


**Provided for non-commercial research and educational use only.  
Not for reproduction or distribution or commercial use.**

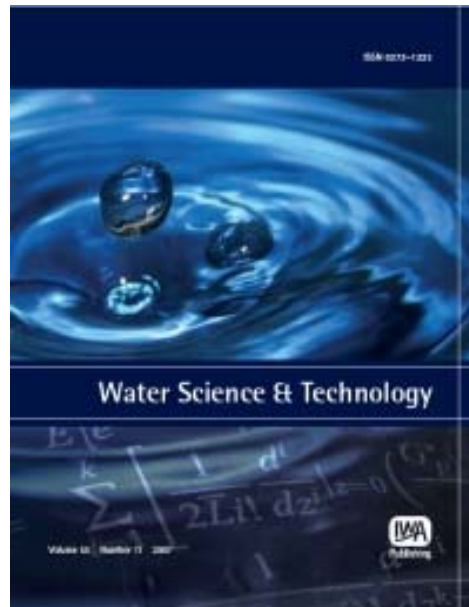

This article was originally published by IWA Publishing. IWA Publishing recognizes the retention of the right by the author(s) to photocopy or make single electronic copies of the paper for their own personal use, including for their own classroom use, or the personal use of colleagues, provided the copies are not offered for sale and are not distributed in a systematic way outside of their employing institution.

Please note that you are not permitted to post the IWA Publishing PDF version of your paper on your own website or your institution's website or repository.

Please direct any queries regarding use or permissions to [wst@iwap.co.uk](mailto:wst@iwap.co.uk)

## Water quality assessment in an arid region using a water quality index

M. Nemati Varnosfaderany, N. Mirghaffary, E. Ebrahimi and A. Soffianian

### ABSTRACT

Water quality of the Zayandehrud River, located in an arid region of central part of Iran, was assessed using National Sanitation Foundation Water Quality Index (NSF WQI) calculated by four aggregation methods. Water samples were collected monthly (July 2006 to June 2007) from eight stations in the middle of the river. The parameters required for the NSF WQI calculations including saturation percent of dissolved oxygen, biochemical oxygen demand, fecal coliforms, pH, nitrate, total phosphate, temperature deviation, total dissolved solids and turbidity were measured. According to WQI<sub>m</sub> which appeared to be more adapted to environmental conditions of the Zayandehrud River, the studied section of the river was considered as “reasonable” to “polluted” water quality. All of the calculated water quality indices showed the lowest values in August. In addition to BOD<sub>5</sub> and fecal coliform amounts which were generally high, nitrate and total phosphate concentrations were also considerably increased due to agriculture practices in August. Generally, BOD<sub>5</sub> and fecal coliforms are the main water quality subindices that reflect the effect of anthropogenic activities on the water quality of this river.

**Key words** | aggregation method, NSF WQI, water quality, Zayandehrud River

M. Nemati Varnosfaderany

N. Mirghaffary

E. Ebrahimi

A. Soffianian

Department of Natural Resources,  
Isfahan University of Technology,  
Isfahan, 84156-83111,  
Iran

E-mail: [mnemati@na.iut.ac.ir](mailto:mnemati@na.iut.ac.ir);  
[mnorolah@cc.iut.ac.ir](mailto:mnorolah@cc.iut.ac.ir);  
[e\\_ebrahimi@cc.iut.ac.ir](mailto:e_ebrahimi@cc.iut.ac.ir);  
[soffianian@cc.iut.ac.ir](mailto:soffianian@cc.iut.ac.ir)

### INTRODUCTION

The evaluation of temporal and spatial water quality trends is an important task for river management. One evaluation approach is to develop water quality indices of multiple parameters, providing a simple and comprehensible tool to manage of the quality of a given water body and its possible applications. Water quality index (WQI) attempts to provide a mechanism for presenting a cumulatively derived numerical expression defining a certain level of water quality (Hallock 2002).

The WQI approach has many variations concerning the selected parameters and aggregation methods. Some comparative studies have been reported in the literature (Landwehr & Deininger 1976; Ott 1978; Smith 1990). The assessment of river water quality by water quality indices has been developed in different countries such as India (Bhargava 1983), Poland (Dojlido *et al.* 1994), Dalmatia (Štambuk-Giljanović 1999), Thailand

(Bordalo *et al.* 2001), Zimbabwe (Jonnalagadda & Mehere 2001), Taiwan (Liou *et al.* 2004), South-America (Debels *et al.* 2005), Malaysia (Azrina *et al.* 2006), Portugal and Spain (Bordalo *et al.* 2006), Canada (Lumb *et al.* 2006), Mexico (Sedeño-Díaz & López-López 2007) and Nepal (Kannel *et al.* 2007).

Nagels *et al.* (2001) indicated that most of the efforts to obtain water quality indices have made limited success and have not been widely adopted. Smith (1990) argued that a major reason for this could be due to the fact that most indices are involved aggregation of scores for individual water quality variables, resulting in “hiding” of valuable information compared to the raw water quality data. Furthermore, a low score for one variable that is a severe limitation for water use may be masked when aggregated with relatively high scores for other variables.

Different aggregation methods are available for calculation of water quality index. *Liou et al.* (2004) discussed various types of aggregation methods and presented some examples of their application. The National Sanitation Foundation Water Quality Index (NSF WQI) is one of the first water quality indices (*Brown et al.* 1970) that aggregate nine water quality parameters through weighted arithmetic mean function (Equation 1). *McClelland* (1974) used weighted geometric mean function (Equation 2) and found that it is more sensitive than the weighted arithmetic mean function to show changes in the individual variables.

The unweighted harmonic square mean formula (Equation 3), an aggregation method of sub index results, has been also suggested as an improvement over the both weighted arithmetic and weighted geometric mean formulas (*Dojlido et al.* 1994). Minimum operator (Equation 4) is another aggregation function which avoids eclipsing entirely (*Ott* 1978; *Smith* 1990).

$$WQI_a = \sum_{i=1}^n SI_i W_i \quad (1)$$

$$WQI_m = \prod_{i=1}^n SI_i W_i \quad (2)$$

$$WQI_{har} = \sqrt{\frac{n}{\sum_{i=1}^n 1/SI_i^2}} \quad (3)$$

$$WQI_{min} = \text{Minimum}(SI_1, SI_2, SI_3, \dots) \quad (4)$$

Where WQI is water quality index,  $n$  is number of parameters,  $SI_i$  is sub index  $I$ , and  $W_i$  is weight given to sub index  $i$ .

Iran is situated in the dry belt of the world, and water supply for various consumptions is an important challenge for national and local authorities. Furthermore, increase of population, industrial development and agricultural activities around the main rivers, such as the Zayandehrud River, have caused the degradation of water quality. The water quality monitoring programs in Iran are mainly based on determination of some physical and chemical parameters. Use of water quality index has still not been in general use as a tool for assessment and management of the river ecosystems. The purpose of this study is to determine the water quality of the Zayandehrud River based on NSF WQI using four aggregation methods.

## MATERIALS AND METHODS

### Study area


The Zayandehrud basin is located in an arid region of the central part of Iran, with geographical coordinates between 50° 24' to 53° 24' E and 31° 11' to 33° 42' N (*Figure 1*). The area of the basin is about 42,000 km<sup>2</sup>, with an altitude ranging from 1,466 to 3,974 m and average annual rainfall of 130 mm (*Salemi et al.* 2000). The Zayandehrud River emanates from Chadegan dam and after a distance of 350 km, discharges to the international Gavkhooni's wetland. Its flow regime depends not only on climatic conditions, but also is affected by hydroelectric power generation as well as irrigation needs through the dam. Major land uses in the catchment basin include agriculture and urban development. Eight stations ( $S_1$  to  $S_8$ ) were selected in the middle of the Zayandehrud River, from Baghbahadoran to Zyar along 132 km of river course, where human activities are intensified (*Figure 1*). The first station was located above Baghbahadoran City, where the water quality is acceptable for producing drinking water and is pumped to the Isfahan water treatment plant (*Pourmoghadas* 2002). The common characteristics of stations 1 to 6 are the presence of cobbles and pebbles, and sometimes sand and gravel; the two downstream stations have muddy type sediments. Water samples at each site were collected monthly from July 2006 to June 2007.

### Sampling strategy

At each site, water samples were collected from the top 30-cm of the water column at the middle of the river using an acid-washed plastic bucket, rinsed with water of the site. Water samples were stored in the bottles (for chemical analysis) and sterile glass flasks (for bacteriological analysis), cooled, transported to the laboratory and processed within 12 h of collection. The flow rate data of the eight hydrometric stations were obtained from the [Isfahan regional water organization](#).

### Analytical procedures

A total of nine parameters required for the NSF WQI calculations were measured monthly. Analytical methods were chosen from *Standard Methods* (1992), method

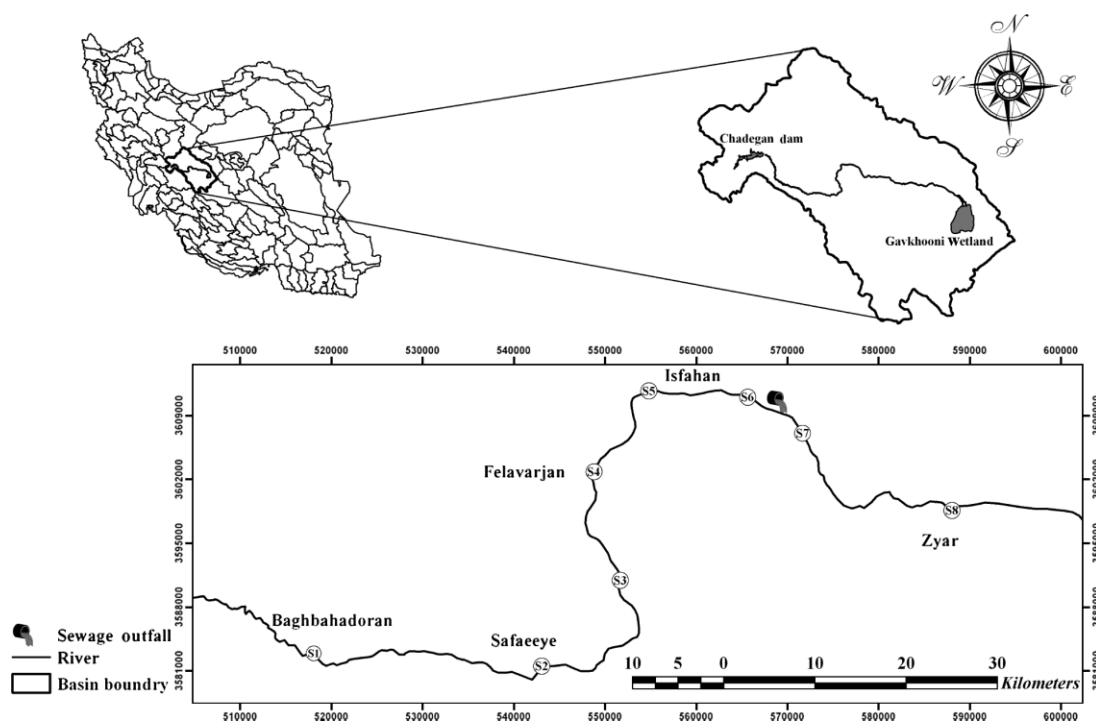

**Figure 1** | Map of the Zayandehrud basin with sampling stations along the river.

numbers are cited in parentheses. The parameters include; 5-day biological oxygen demand ( $BOD_5$ ) (5210 A), saturation percent of dissolved oxygen (%DO) (4500-O G, field measured with WTW Oxi230), fecal coliforms (9221 E), nitrates ( $4500-NO_3^-$  D), pH (4500- $H^+$ B, field measured with Testo meter 251), total phosphorus (4500-P E, by presulfate digestion), total dissolved solids (2510-A, field measured with Jenway meter 4200, by an empirical factor), temperature (2550-B, field measured) and turbidity (2130 B, field measured with DRT-15 in NTU units).

### Data analysis

All chemical and bacteriological analyses were performed in duplicate and the means were subjected to statistical analysis. The measured individual parameters were compared to standard curves in order to generate subindices. The NSF WQI was calculated monthly in each station with four aggregation methods namely  $WQI_a$ ,  $WQI_m$ ,  $WQI_{har}$  and  $WQI_{min}$  (Equations (1) to (4) respectively). Temporal and spatial variations of the river water quality were investigated by calculated indices.

Normality of data was tested using the Kolmogorov-Smirnov test. Fecal coliform data were log-transformed in order to stabilize the variance. One-way analysis of variance (ANOVA) followed by Duncan multiple comparison tests were conducted to determine the significant differences between of water quality indices among sites and flow periods. Stepwise regression analysis was used to denote the main factors that determine variation of WQI (Zar 1999). All statistical analyses were performed using the SPSS software (version 10). The water quality map was generated with Surfer 6.01 software and kriging was used as an interpolating method.

## RESULTS

### Flow regime

Due to low rainfall in the studied region and water use for irrigation (mostly rice and wheat), the main factor that affects the flow regime of Zayandehrud River is the cultivation season. In the winter season (December to

February), the agricultural activities are limited and therefore the lowest discharge occurred. The influx water from Chadegan dam to Zayandehrud River increases at the late of the February, corresponding to the beginning of the agricultural activities in this region. Figure 2 represents the monthly flow rate during the water sampling. Water consumption for agricultural use could be estimated from standard deviations that are presented with bars on each monthly mean flow (Figure 2). The most water use was shown to be during April to August months. On the other hand, the high water use in October was due to fall cultivation (mostly wheat) in the eastern part of Isfahan province ( $S_7$  and  $S_8$ ). Generally, the flow regime of the Zayandehrud River is classified into a high flow period (March to November) and a low flow period (December to February).

### Water quality parameters

Spatial variation of water quality parameters with regard to the high flow period (HFP) and the low flow period (LFP) are shown in Figure 3. Surface water temperature increased steadily from upstream to downstream (Figure 3A), and ranged between 4°C and 31°C in the HFP and 0°C to 12.5°C in the LFP ( $p < 0.01$ ). Oxygen saturation decreased sharply at two downstream stations ( $S_7$  and  $S_8$ ) and had significant differences ( $p < 0.01$ ) with six upstream stations ( $S_1$  to  $S_6$ ) at both periods of flow (Figure 3B).

Nitrate steadily increased from upstream to downstream of the river (Figure 3C), but significant differences only were found between  $S_1$  and  $S_8$  ( $p < 0.01$ ) on both periods of flow. Nitrate values during the LFP were significantly lower than the HFP ( $p < 0.01$ ). Maximum

nitrate content of the river occurred in August ( $29.55 \pm 4.27 \text{ mg L}^{-1}$ ) and September ( $26.33 \pm 3.76 \text{ mg L}^{-1}$ ). Phosphate increased significantly ( $p < 0.01$ ) at two downstream stations ( $S_7$  and  $S_8$ ) during the LFP (Figure 3D). Maximum phosphate content of the river was measured in July ( $1.13 \pm 0.03 \text{ mg L}^{-1}$ ) and August ( $1.12 \pm 0.02 \text{ mg L}^{-1}$ ).

The variations of  $\text{BOD}_5$  means did not follow a clear spatial trend at the two periods of flow (Figure 3E). However, the range of measured values varied from 1.8 to  $32.4 \text{ mg L}^{-1}$  in the HFP ( $18.20 \pm 0.88 \text{ mg L}^{-1}$ ) and 13.8 to  $25.2 \text{ mg L}^{-1}$  in the LFP ( $20.08 \pm 0.52 \text{ mg L}^{-1}$ ). The pH values varied between 7.37 to 8.38 in the LFP and 6.9 to 8.33 in the HFP (Figure 3F), indicating no significant differences. However, the pH values at two downstream stations ( $S_7$  and  $S_8$ ) were statistically lower than six upstream stations during the HFP ( $p < 0.01$ ).

The total dissolved solids showed a steady increase from upstream to downstream of the river (Figure 3G), ranging from 73.9 to  $212 \text{ mg L}^{-1}$  in the HFP and 137 to  $306 \text{ mg L}^{-1}$  in the LFP. Significant differences were found between the two periods ( $p < 0.01$ ). Water transparency increased significantly at five upstream stations ( $S_1$  to  $S_5$ ) during the LFP, when turbidity averaged  $3.28 \pm 0.29 \text{ NTU}$  against  $5.61 \pm 0.32 \text{ NTU}$  in the HFP (Figure 3H). Highest values of turbidity were in August ( $9.61 \pm 1.01 \text{ NTU}$ ).

Fecal coliforms steadily increased from  $S_1$  to  $S_6$  (Figure 3I), but increased sharply at  $S_7$  (average  $30,750 \pm 3,921.8 \text{ MPN Coli } 100 \text{ ml}^{-1}$ ) and decreased at  $S_8$  ( $10,469.17 \pm 1,864.36 \text{ MPN Coli } 100 \text{ ml}^{-1}$ ). Two downstream stations ( $S_7$  and  $S_8$ ) had significant differences with six upstream stations at the two periods ( $p < 0.01$ ). No significant differences were found between the periods of flow in terms of fecal coliforms.

### Water quality index

The spatial and temporal variations of the NSF WQI calculated with the four aggregation method (Equations 1–4) for Zayandehrud River are represented in Figures 4 and 5. Annual mean of calculated water quality indices at each sampling station along the river showed a steady decline to downstream (Figure 4). At two downstream stations ( $S_7$  and  $S_8$ ), this decline was statistically significant ( $p < 0.01$ ). Overall, spatial trends of four calculated water


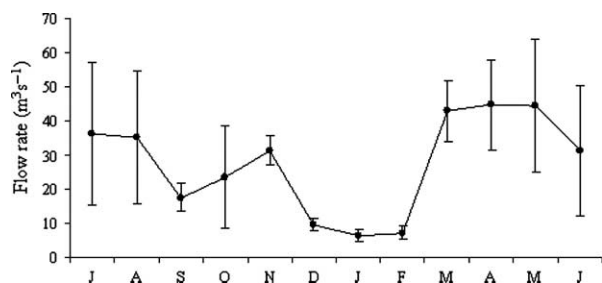


Figure 2 | Monthly means of flow rates in the Zayandehrud River. The bar denotes  $\pm$  SD.

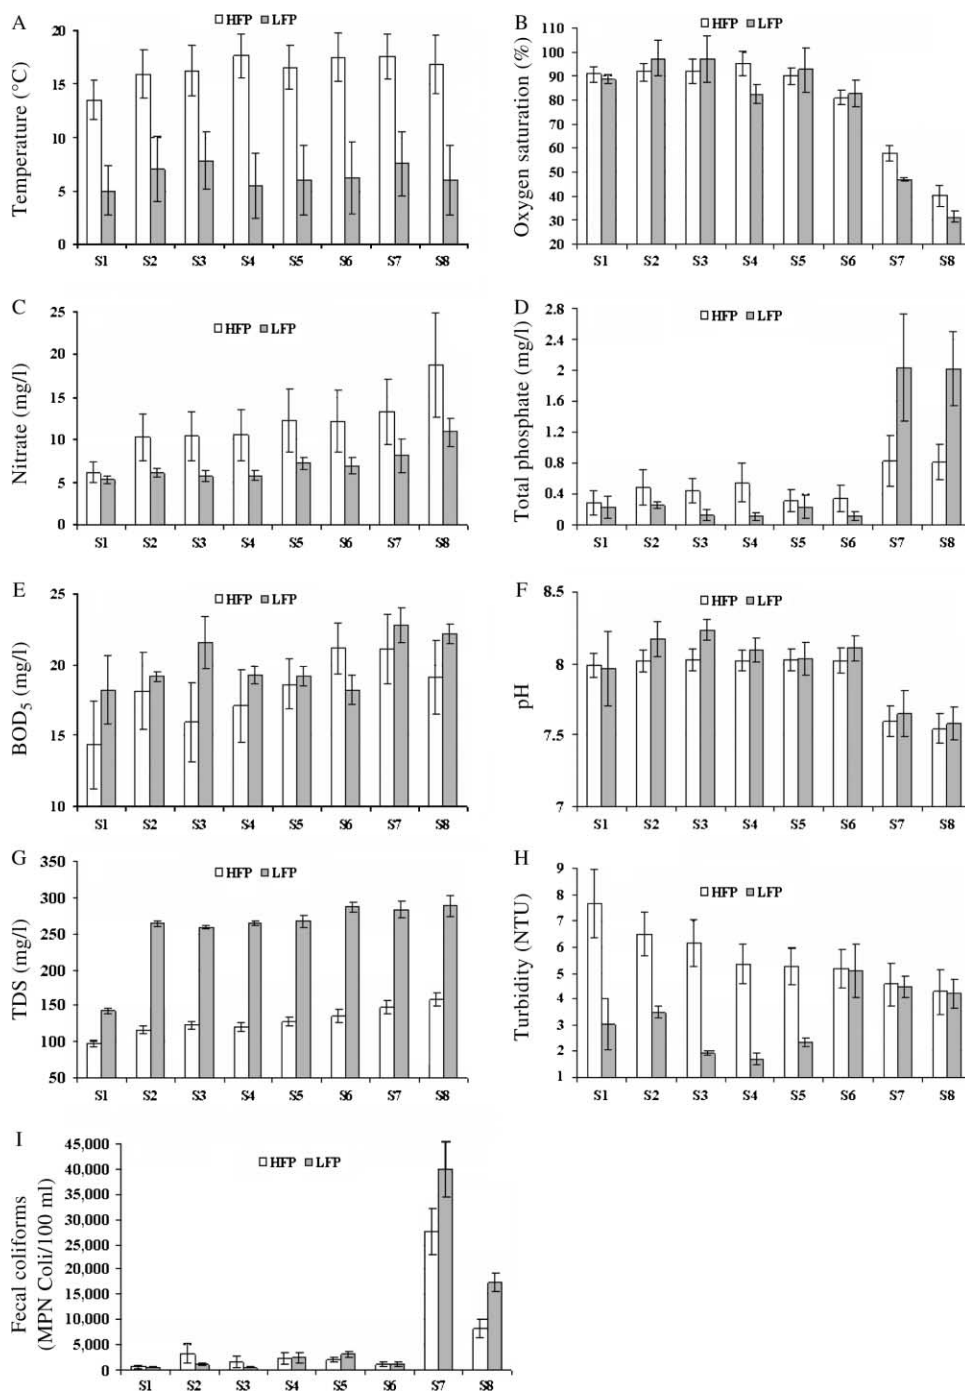


**Figure 3** | Spatial variations of water quality variables in the Zayandehrud River at high flow (HFP) and low flow period (LFP). (A) Temperature, (B) Oxygen saturation, (C) Nitrate, (D) Total phosphate, (E) BOD<sub>5</sub>, (F) pH, (G) TDS, (H) Turbidity, (I) Fecal coliforms. The bar denotes  $\pm$  SE.

quality indices at six upstream stations (S<sub>1</sub> to S<sub>6</sub>) were similar. However, at two downstream stations (S<sub>7</sub> and S<sub>8</sub>), WQI<sub>a</sub> and WQI<sub>m</sub> showed reverse trends in compare to WQI<sub>har</sub> and WQI<sub>min</sub>. The annual mean of WQI<sub>a</sub> and WQI<sub>m</sub>

at S<sub>7</sub> were greater than S<sub>8</sub>, while those of WQI<sub>har</sub> and WQI<sub>min</sub> at S<sub>8</sub> were greater than that of S<sub>7</sub>.

At each station, the range of calculated water quality indices are in order of: WQI<sub>a</sub> (42.9 to 74), WQI<sub>m</sub> (27.2 to

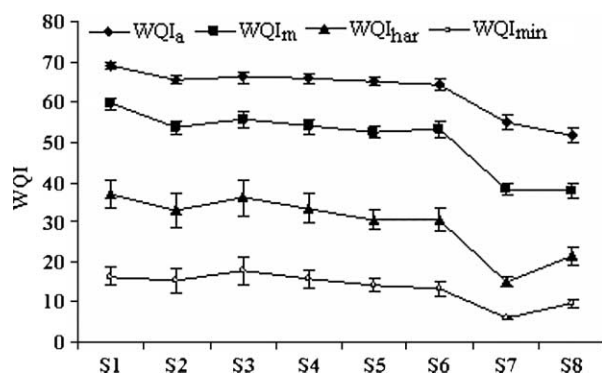


**Figure 4** | Annual means of calculated indices at each sampling station along the Zayandehrud River. The bar denotes  $\pm$  SE.

64.9),  $WQI_{har}$  (5.6 to 68.8) and  $WQI_{min}$  (2 to 41) and statistically different ( $p < 0.01$ ). The minimum monthly means of calculated indices for all sampling stations were in August. Also,  $WQI_{har}$  and  $WQI_{min}$  indicated the deterioration of water quality in July and April (Figure 5). In the fall season, the water quality was better than in other seasons. All of the calculated water quality indices showed no significant differences between the two periods of flow.

According to the adapted definition (Table 1), it should be stressed that none of the single calculated indices were considered excellent ( $WQI > 91$ ).  $WQI_a$  mainly placed (85.4%) the water quality of the Zayandehrud River in the class of “reasonable”, while according to  $WQI_m$ , 59.4% of samples were considered “reasonable” and 40.6% “polluted”. Based on  $WQI_{har}$ , 45.9% of data were considered as “polluted” and 47.9% as “badly polluted”. For  $WQI_{min}$ , 90.7% of data were considered as “badly polluted”.

From stepwise regression, it was found that oxygen saturation was the parameter that played the most crucial

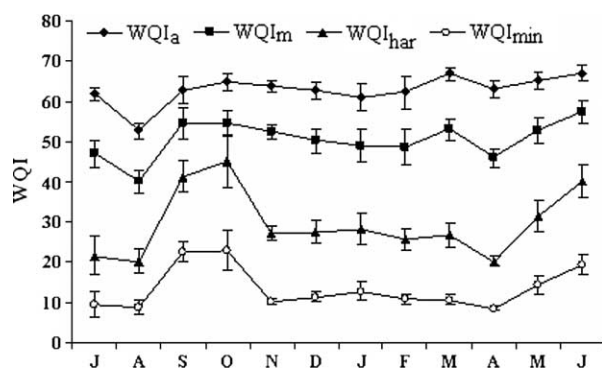

**Figure 5** | Monthly means of calculated indices along the Zayandehrud River. The bar denotes  $\pm$  SE.

role for variations of  $WQI_a$  and  $WQI_m$  ( $R^2 = 0.65$  and  $0.62$ , respectively,  $p < 0.001$ ). Whereas, in  $WQI_{har}$  and  $WQI_{min}$ ,  $BOD_5$  was the main factor of variations ( $R^2 = 0.35$  and  $0.31$ , respectively,  $p < 0.001$ ).

## DISCUSSION

### Water quality parameters

Great decrease in annual means of oxygen saturation (40–60%) and pH (approximately 0.5 unit) as well as the increase of total phosphate and fecal coliforms (Figure 3) at two downstream stations ( $S_7$  and  $S_8$ ) could be due to discharge of urban sewage from the Isfahan wastewater treatment plant to the river at 3 km above the  $S_7$ . In general, urban wastewater has a neutral or slightly acidic pH. It causes an eutrophication process in the receiving water body due to an excessive input of organic material and plant nutrients (Hammer 1986). It should be mentioned that the amount of fecal coliforms in the majority of the sampling stations is so high that water use is not permitted even for recreation contact. Steady increase of TDS and nitrate along the river reflect the cumulative effects of point and non point pollution sources which through effluent, drained and runoff water enter the river. The high nitrate level at HFP (Figure 3C) corresponds to the cultivation season and use of fertilizers in this region.

In all the samples,  $BOD_5$  values were higher than that of the standard limit ( $5 \text{ mg L}^{-1}$ ) for unpolluted rivers (Hammer 1986). High  $BOD_5$  content in the Zayandehrud River without clear spatial trend reveals the extent of organic pollution and a failure of self-purification in this river. Turbidity of water (Figure 3H) at five upstream stations ( $S_1$  to  $S_5$ ) is related to flow rate and turbulence of the water. At three downstream stations ( $S_6$  to  $S_8$ ), the turbidity is affected by aquatic vegetation as well as the muddy substrate of the river.

### Water quality index

The NSF WQI is a general water quality index. In some cases, it may be necessary to adapt the water quality indices to local conditions. For example, water of Zayandehrud

**Table 1** | Class ratings in percentage for water quality indices values in the Zayandehrud River\*

	WQI <sub>a</sub>				WQI <sub>m</sub>		WQI <sub>har</sub>		WQI <sub>min</sub>		
	Polluted 21–40	Reasonable 41–70	Good 71–90	Excellent 91–100	Reasonable 41–70	Good 71–90	Badly polluted 0–20	Polluted 21–40	Reasonable 41–70	Badly polluted 0–20	Polluted 21–40
S1	41.7	58.3			91.7	8.3	16.6	41.7	41.7	91.7	8.3
S2		100			75.0	25.0	8.3	58.3	33.3	83.4	16.6
S3		100			83.4	16.6	16.6	41.7	41.7	75.0	25.0
S4	8.3	91.7			66.7	33.3	8.3	66.7	25.0	83.4	16.6
S5		100			83.4	16.6		66.7	33.3	100	
S6		100			75.0	25.0		66.7	33.3	91.7	8.3
S7		66.7	33.3			100			100	100	
S8		66.7	33.3			100		25.0	75.0	100	
Total mean	6.3	85.4	8.3		59.4	40.6	6.24	45.8	47.9	90.6	9.4

\*Rating scales according to House & Ellis (1987) and Bordalo *et al.* (2006).

River is alkaline with an average pH > 8. While, it is about 7.5 (Figure 3F) at two downstream stations (S<sub>7</sub> and S<sub>8</sub>), resulting in slightly higher subindex scores compared with the upstream part of the river. Nevertheless, because of its negligible impact on the calculated indices, the pH curve was not modified.


As shown in Figure 4, spatial trends of water quality indices in the Zayandehrud River are similar. However, the calculated water quality indices by four aggregation methods reveal their specifications at two downstream stations (S<sub>7</sub> and S<sub>8</sub>) as well as on the range of variability between stations. High values of fecal coliforms at S<sub>7</sub> (Figure 3I) caused lower values in WQI<sub>har</sub> in comparison with S<sub>8</sub>, indicating a poor self-purification of the river between these two stations. In contrast to WQI<sub>a</sub> and WQI<sub>m</sub>, WQI<sub>har</sub> (Equation 4) do not has a weighting factor and, is very sensitive to low values of subindices such as fecal coliforms in this situation. On the other hand, the range of variability between stations is in order of: WQI<sub>har</sub> > WQI<sub>m</sub> > WQI<sub>a</sub> > WQI<sub>min</sub>.

The values of WQI<sub>min</sub> were obtained from BOD<sub>5</sub> (61%), fecal coliforms (37%) and nitrate (2%) subindices, respectively. All of the calculated water quality indices showed the lowest values in August (Figure 5). In addition to BOD<sub>5</sub> and fecal coliforms amounts which were generally high, nitrate and total phosphate concentrations were considerably increased in August due to agricultural activities.

Better water quality in the Zayandehrud River during the fall season is due to the relatively high flow rate (an average of 24.2 m<sup>3</sup> s<sup>-1</sup>) coincident with a decrease of agricultural activities in the region. It should be noted that the cultivation pattern and consequently the irrigation needs are different in the upstream and downstream of the basin.

The effect of aggregation methods on NSF WQI calculation is more distinct when classification of water quality is taken into account. In this study, the water of the Zayandehrud River according to different aggregation methods (Equations 1–4), has different quality classes (Table 1) as the water quality varies from “reasonable” (85.4%) to “badly polluted” (90.7%). Thus, the selection of an aggregation method is an essential step to survey and describe the state of a given water body.

Although WQI<sub>min</sub> does not present an eclipsing problem, it is not suitable as an aggregation function, because it fails to give a composite picture of water quality (Swamee & Tyagi 2000). In this regard, whereas only 25.5% data of subindices (mainly BOD<sub>5</sub> and fecal coliforms) in the Zyandeh Rud River are lower than 40 scores, but WQI<sub>min</sub> means at all of the stations are 20 scores (Figure 4). Swamee & Tyagi (2000) indicated that the aggregation formula in WQI<sub>har</sub> suffers from ambiguity. In fact, although the water is of acceptable quality, the harmonic aggregation formula classifies it as unacceptable. A distinctive example of this ambiguity for WQI<sub>har</sub> is observed in November for the

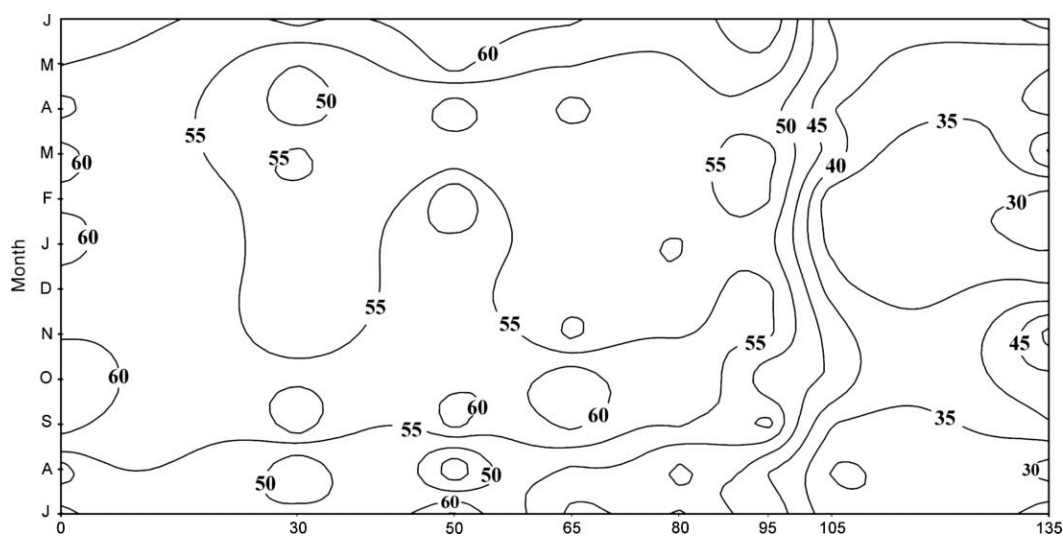

## REFERENCES

- Azrina, M. Z., Yap, C. K., Rahim Ismail, A., Ismail, A. & Tan, S. G. 2006 [Anthropogenic impacts on the distribution and biodiversity of benthic macroinvertebrates and water quality of the Langat River, Peninsular Malaysia](#). *Ecotoxicol. Environ. Saf.* **64**, 337–347.
- Bhargava, D. S. 1983 [Use of a water quality index for river classification and zoning of Ganga river](#). *Environ. Pollut. Ser. B* **6**, 51–67.
- Bordalo, A. A., Nilsumranchit, W. & Chalermwat, K. 2001 [Water quality and uses of the Bangpakong river \(Eastern Thailand\)](#). *Water Res.* **35**(15), 3635–3642.
- Bordalo, A. A., Teixeira, R. & Wiebe, W. J. 2006 [A water quality index applied to an international shared river basin: the case of the Douro River](#). *Environ. Manage.* **38**, 910–920.
- Brown, R. M., McClellan, N. I., Deininger, R. A. & Tozer, R. G. 1970 [A water quality index – do we dare?](#) *Water Sewage Works* **117**, 339–343.
- Debels, P., Figueroa, R., Urrutla, R., Barra, R. & Niell, X. 2005 [Evaluation of water quality in the Chillan river \(central Chile\) using physicochemical parameters and modified water quality index](#). *Environ. Monit. Assess.* **110**, 301–322.
- Dojlido, J. R., Raniszewski, J. & Woyciechowska, J. 1994 [Water quality index applied to rivers in Vistula River Basin in Poland](#). *Environ. Monit. Assess.* **33**, 33–42.
- Hallock, D. 2002 [A Water Quality Index for Ecology's Stream Monitoring Program](#), Technical Report, P No. 02-03-52, Washington Department of Ecology, Environmental Assessment Program, Olympia, WA.
- Hammer, M. J. 1986 *Water and Wastewater Technology*, Second edition. Prentice-Hall International, Inc., New Jersey, p. 536.
- House, M. A. & Ellis, J. B. 1987 [The development of water quality indices for operational management](#). *Water Sci. Technol.* **19**(9), 145–154.
- Isfahan Regional Water Organization. *Hydrometric data of the Zayandehrud flow rate collected from 2003 to 2004*.
- Jonnalagadda, S. B. & Mehre, G. 2001 [Water quality of the Odzi river in the eastern highlands of Zimbabwe](#). *Water Res.* **35**(10), 2371–2376.
- Kannel, P. R., Lee, S., Lee, Y. S., Kanel, S. R. & Khan, S. P. 2007 [Application of water quality indices and dissolved oxygen as indicators for river water classification and urban impact assessment](#). *Environ. Monit. Assess.* **132**, 93–110.
- Landwehr, J. M. & Deininger, R. A. 1976 [A comparison of several water quality indexes](#). *WPCF* **48**(5), 954–958.
- Liou, S. M., Lo, S. L. & Wang, S. H. 2004 [A generalized water quality index for Taiwan](#). *Environ. Monit. Assess.* **96**, 35–52.
- Lumb, A., Halliwell, D. & Sharma, T. 2006 [Application of CCME water quality index to monitor water quality: a case of the Mackenzie River basin, Canada](#). *Environ. Monit. Assess.* **113**, 411–429.
- McClelland, N. I. 1974 [Water quality index application in the Kansas River Basin](#). U.S Environmental Protection Agency, Region 7. Kansas City, Missouri.
- Nagels, J. W., Davies-Colley, R. J. & Smith, D. G. 2001 [A water quality index for contact recreation in New Zealand](#). *Water Sci. Technol.* **43**(5), 285–292.
- Ott, W. R. 1978 *Environmental Indices: Theory and Practice*. Ann Arbor Science Publishers Inc, Ann Arbor, Michigan.
- Pourmoghadas, H. 2002 *Water Resources Management Project. Final Report*. Isfahan Environmental Protection Agency. Isfahan. Iran. Persian.
- Salemi, H. R., Mamanpoush, A. R., Miranzadeh, M., Akbari, M., Torabi, M., Toomanian, N., Murray-Rust, H., Droogers, P., Sally, H. & Gieske, A. 2000 *Water management for sustainable irrigated agriculture in the Zayandehrud Basin*, Esfahan Province, Iran. IAERI-IWMI Research Reports 1.
- Sedeño-Díaz, J. E. & López-López, E. 2007 [Water quality in the Río Lerma, Mexico: an overview of the last quarter of the twentieth century](#). *Water Resour. Manage.* **21**, 1797–1812.
- Smith, D. G. 1990 [A better water quality indexing system for streams and rivers](#). *Water Res.* **24**, 1237–1244.
- Štambuk-Giljanović, N. 1999 [Water quality evaluation by index in Dalmatia](#). *Water Res.* **33**(16), 3423–3440.
- Standard Methods for the Examination of Water and Wastewater* 1992 18th edition. American Public Health Association, Washington, DC, USA.
- Swamee, P. K. & Tyagi, A. 2000 [Describing water quality with aggregate index](#). *Environ. Eng.* **126**(5), 451–455.
- Zar, J. H. 1999 *Biostatistical Analysis*, 4th edition. Prentice Hall, Upper Saddle River, NJ.